

Cabinet 42UR



Deep and Single

Description

The Optronics 42UR Rack Cable Management Cabinet features and all steel, welded frame construction that provides durable, high quality rack storage, designed to housing any standard 19" rack mount equipment, as well as to manage and protect the network system.

The Optronics 42UR cabinet is ideally designed to suit any server room, as it holds removable panels on its top and bottom, to allow the entrance of cabling, and avoiding additional drilling. It also holds two side removable panels to ease the installation and maintenance of equipments.

The Optronics 42UR cabinet features two configurations: Single and Deep. This last feature allows wider device installation or a greater area for cable management.

Available in two versions: the Toughened Glass Door, which enables the vision of inside the cabinet without open it, and the Steel Mesh Door, to optimize ventilation that helps keep the inside of the cabinet fresh.

Both door options are keyed locked, two keys included.

The rear door is also solid steel with ventilation slots to help assist with rack ventilation and equipment optimal performance.



Specifications

Deep cabinet	Packing dimension
	670 x 1070 x 2085 mm
	Width: 600 mm
	Depth: 1000 mm
Single cabinet	Height: 2055 mm
	Packing dimension 670 x 670 x 2085 mm
	Width: 600 mm
Cabinet material	Depth: 600 mm
	Height: 2055 mm
	SPCC cold rolled steel
Front door	Toughened glass
Rear door	SPCC with ventilation
Side panel	Hexagonal hole for ventilation
Mounting profile	2 pieces. Easy to install, removable to ease maintain
Mounting profile thickness	4 pieces numbered
Mounting profile material	2.0 mm
Mounting angle	SPCC, blue zinc surface finish
Mounting angle thickness	6 pieces
Thickness, other materials	1.5 mm
Frame	1.2 mm
Heavy duty castor	28 x 120 x 1010 mm
Surface finish	4 pieces, diameter 2"
Surface color	Degreasing, phosphoric, powder coated
Degree of protection	RAL 9004
Load capacity	IP20
Standard	800 Kg (with adjustable feet)
	ANSI/EIA RS-310-D, IEC 297-2, DIN 41494-1, DIN 41494-7, ETSI.

Accessories

- M6 B-head screw
- M6 square nut
- Allen wrench
- M12 adjustable feet

Additional Accessories, not included


- 19" power strip, with 3 double plug
120 – 240 VCA 10a, 1.8m cable length
- fan kit, 120 VCA 60Hz
- 1 fluorescing tube lighting kit, 120 VCA 60Hz
- Fixed or slide trays, SPCC cold steel T1.2 / 14"
- Horizontal cable Organizer

Cabinet 42UR




Deep and Single

Steel mesh door

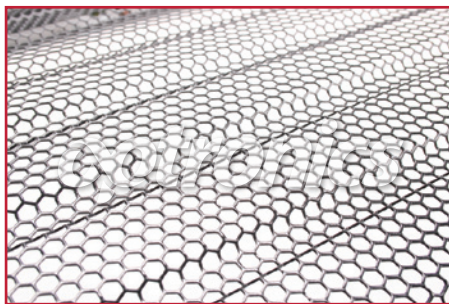

Toughened glass door

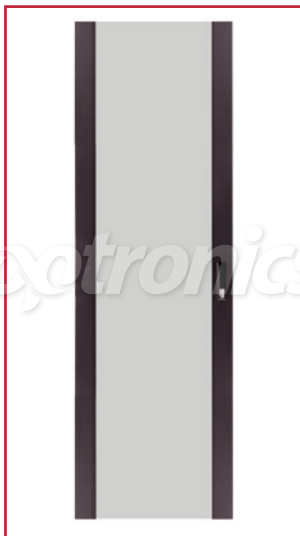

Additional Accessories, not included



2 double fan kit, 120VCA 60Hz



Slide trays



Power strip



Fluorescing tube lighting kit



Horizontal cable Organizer